

Downlights

FLAT SERIES

INTERIOR
DOWNLIGHTS
AISI 316L S.STEEL

Ceiling recessed LED downlights with symmetrical light distribution on flood beam.
Low installation depth required.
Square flat frame.

Body: AISI 316L Stainless Steel
Frame: AISI 316L Stainless Steel
Protective glass: SANDED GLASS
Color temperature: 2700 K - 3000 K

Note : Driver not included. **[CSL]**

OCEAN / FLAT Ø 90 - 10 W

DRIVER TENSION: 110 - 220 **[CSL]**
Vf 28 If 350 mA
24 V DC - 5 W **[CLL]**



Downlights

BARON

INTERIOR
DOWNLIGHT
AISI 316L S.STEEL

Ceiling recessed LED downlight with symmetrical light distribution on a wide beam.
A sanded glass diffuser ensures uniform light distribution.
Square frame.

Body: Polycarbonate
Frame: AISI 316L Stainless Steel
Protective glass: SANDED GLASS
Color temperature: 2700 K - 3000 K

Note : Driver not included. **[CSL]**


BARON Ø 113 - 10 W

DRIVER TENSION: 110 - 220 **[CSL]**
Vf 28 If 350 mA



DESERT / FLAT Ø 76 - 5 W

DRIVER TENSION: 110 - 220 **[CSL]**
Vf 9 If 500 mA
24 V DC - 5 W **[CLL]**

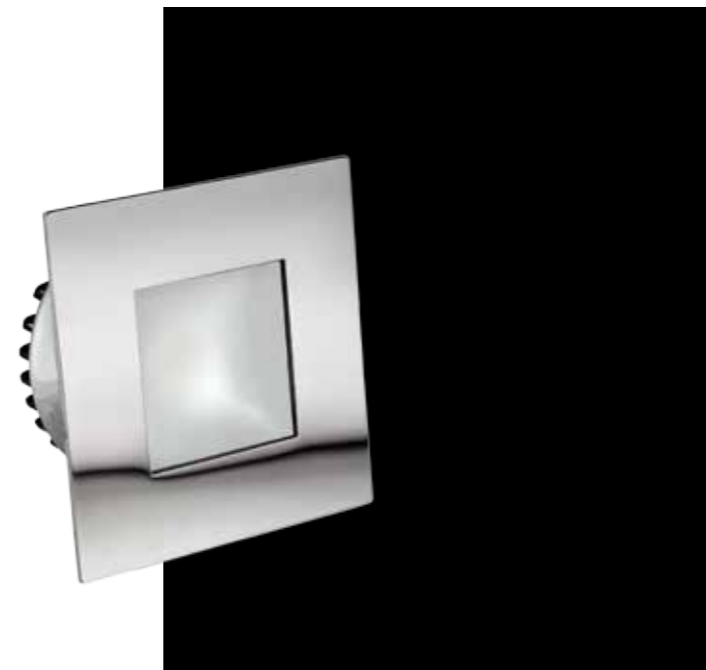

TIDE GLASS

INTERIOR
DOWNLIGHT
GLASS

Ceiling recessed LED downlight with symmetrical light distribution on a flood beam.
Glass frame, white lacquered and sanded on the back face, makes its design pure and elegant.
Square frame.

Body: AISI 316L Stainless Steel
Frame: GLASS LACQUERED
Protective glass: SANDED GLASS
Color temperature: 2700 K - 3000 K

Note : Driver not included. **[CSL]**

TIDE GLASS Ø 120 - 12 W




DRIVER TENSION: 110 - 220 **[CSL]**
Vf 34 If 350 mA





ROSS DOWNLIGHT - 10W - Vf 28 v DC If 350 mA / 5 W - 24 v DC

* LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K



MODEL SPECIFICS:

MODEL CODE: LUMEN: LM/W: BEAM: CRI:
20ROSS01 730 84 53° 80


VARIABLE PRODUCT CODES:

POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 28 If 350 - CSL) | Code: 2 (2700 Kelvin) | Code: CH (Chrome)
Code: D (24 v DC - CLL) | Code: 3 (3000 Kelvin)

* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.



GAT / WW DOWNLIGHT - 12W - Vf 34 If 350 mA



MODEL SPECIFICS:

MODEL CODE:
20GATWW01


VARIABLE PRODUCT CODES:

POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 34 If 350 - CSL) | Code: 2 (2700 Kelvin) | Code: CH (Chrome)
Code: 3 (3000 Kelvin) | Code: LA (Lacquered RAL 9010)

* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.



GAT Q / WW DOWNLIGHT - 12W - Vf 34 If 350 mA



MODEL SPECIFICS:

MODEL CODE:
20GATQWW01

VARIABLE PRODUCT CODES:




POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 34 If 350 - CSL) | Code: 2 (2700 Kelvin) | Code: CH (Chrome)
Code: 3 (3000 Kelvin) | Code: LA (Lacquered RAL 9010)

* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.



GAT DOWNLIGHT - 12W - Vf 34 v DC If 350 mA

* LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K



MODEL SPECIFICS:

MODEL CODE: LUMEN: LM/W: BEAM: CRI:
20GAT01 927 73 46° 80

VARIABLE PRODUCT CODES:




POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 34 If 350 - CSL) | Code: 2 (2700 Kelvin) | Code: CH (Chrome)
Code: 3 (3000 Kelvin) | Code: LA (Lacquered RAL 9010)

* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.



GAT Q DOWNLIGHT - 12W - Vf 34 v DC If 350 mA

* LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K



MODEL SPECIFICS:

MODEL CODE: LUMEN: LM/W: BEAM: CRI:
20GATQ01 927 73 46° 80

VARIABLE PRODUCT CODES:





POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 34 If 350 - CSL) | Code: 2 (2700 Kelvin) | Code: CH (Chrome)
Code: 3 (3000 Kelvin) | Code: LA (Lacquered RAL 9010)

* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.



OCEAN / FLAT DOWNLIGHT - 10W - Vf 28 v DC If 350 mA / 5 W - 24 v DC

* LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K



MODEL SPECIFICS:

MODEL CODE: LUMEN: LM/W: BEAM: CRI:
20OCEANF01 579 65 78° 80

VARIABLE PRODUCT CODES:




POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 28 If 350 - CSL) | Code: 2 (2700 Kelvin) | Code: SS (S/Steel AISI 316L)
Code: D (24 v DC - CLL) | Code: 3 (3000 Kelvin) | Code: LA (Lacquered RAL 9010)

* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.





DESERT / FLAT DOWNLIGHT - 5W - Vf 9 v dc If 500 mA / 5 W - 24 v dc * LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K



MODEL SPECIFICS:

MODEL CODE: LUMEN: LM/W: BEAM: CRI:
20DESERF01 245 52 73° 80




VARIABLE PRODUCT CODES:

POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 9 If 500 - CSL) | Code: 2 (2700 Kelvin) | Code: SS (S/Steel AISI 316L)
Code: D (24 v dc - CLL) | Code: 3 (3000 Kelvin) | Code: LA (Lacquered RAL 9010)



* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.

BARON DOWNLIGHT - 10W - Vf 28 v dc If 350 mA * LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K



MODEL SPECIFICS:

MODEL CODE: LUMEN: LM/W: BEAM: CRI:
20BARON01 715 81 90° 80




VARIABLE PRODUCT CODES:

POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 28 If 350 - CSL) | Code: 2 (2700 Kelvin) | Code: SS (S/Steel AISI 316L)
Code: D (24 v dc - CLL) | Code: 3 (3000 Kelvin) | Code: LA (Lacquered RAL 9010)



* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.

TIDE GLASS DOWNLIGHT - 12W - Vf 34 v dc If 350 mA * LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K

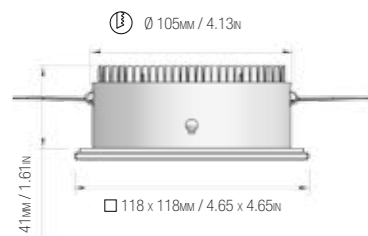

MODEL SPECIFICS:

MODEL CODE: LUMEN: LM/W: BEAM: CRI:
20TIDEG01 784 69 86° 80

VARIABLE PRODUCT CODES:




POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 34 If 350 - CSL) | Code: 2 (2700 Kelvin) | Code: GL (Glass)
Code: D (24 v dc - CLL) | Code: 3 (3000 Kelvin)



* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.



MAIOR OR DOWNLIGHT - 5W - Vf 9 v dc If 500 mA / 5 W - 24 v dc * LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K



MODEL SPECIFICS:

MODEL CODE: LUMEN: LM/W: BEAM: CRI:
20MAIOROR01 264 57 42° 80




VARIABLE PRODUCT CODES:

POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 9 If 500 - CSL) | Code: 2 (2700 Kelvin) | Code: SS (S/Steel AISI 316L)
Code: D (24 v dc - CLL) | Code: 3 (3000 Kelvin)



* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.

MAIOR DOWNLIGHT - 5W - Vf 9 v dc If 500 mA / 5 W - 24 v dc * LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K



MODEL SPECIFICS:

MODEL CODE: LUMEN: LM/W: BEAM: CRI:
20MAIOR01 367 83 68° 80




VARIABLE PRODUCT CODES:

POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 9 If 500 - CSL) | Code: 2 (2700 Kelvin) | Code: SS (S/Steel AISI 316L)
Code: D (24 v dc - CLL) | Code: 3 (3000 Kelvin) | Code: LA (Lacquered RAL 9010)



* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.

VIAREGGIO DOWNLIGHT - 10W - Vf 28 v dc If 350 mA / 5 W - 24 v dc * LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K



MODEL SPECIFICS:

MODEL CODE: LUMEN: LM/W: BEAM: CRI:
20VIARE01 680 76 47° 80

VARIABLE PRODUCT CODES:

POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 28 If 350 - CSL) | Code: 2 (2700 Kelvin) | Code: CH (Chrome)
Code: D (24 v dc - CLL) | Code: 3 (3000 Kelvin) | Code: LA (Lacquered RAL 9010)



* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.