




Downlights

MAIOR

INTERIOR
DOWNLIGHTS
FIXED / ADJUSTABLE
AISI 316L S.STEEL



Ceiling recessed, LED downlights with symmetrical light distribution on a flood beam.
Maior is available fixed or adjustable.
Low installation depth required.
Square frame.

Body: AISI 316L Stainless Steel
Frame: AISI 316L Stainless Steel
Protective glass: SANDED GLASS
Color temperature: 2700 K - 3000 K

Note : Driver not included. 





MAIOR OR 76 - 5 W

DRIVER TENSION: 110 - 220 
Vf 9 If 500 mA
24 V DC - 5 W 






MAIOR 76 - 5 W

DRIVER TENSION: 110 - 220 
Vf 9 If 500 mA
24 V DC - 5 W 





DESERT / FLAT DOWNLIGHT - 5W - Vf 9 v dc If 500 mA / 5 W - 24 v dc * LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K



MODEL SPECIFICS:

MODEL CODE: LUMEN: LM/W: BEAM: CRI:
20DESERF01 245 52 73° 80




VARIABLE PRODUCT CODES:

POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 9 If 500 - CSL) | Code: 2 (2700 Kelvin) | Code: SS (S/Steel AISI 316L)
Code: D (24 v dc - CLL) | Code: 3 (3000 Kelvin) | Code: LA (Lacquered RAL 9010)



* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.

BARON DOWNLIGHT - 10W - Vf 28 v dc If 350 mA * LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K



MODEL SPECIFICS:

MODEL CODE: LUMEN: LM/W: BEAM: CRI:
20BARON01 715 81 90° 80




VARIABLE PRODUCT CODES:

POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 28 If 350 - CSL) | Code: 2 (2700 Kelvin) | Code: SS (S/Steel AISI 316L)
Code: D (24 v dc - CLL) | Code: 3 (3000 Kelvin) | Code: LA (Lacquered RAL 9010)



* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.

TIDE GLASS DOWNLIGHT - 12W - Vf 34 v dc If 350 mA * LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K

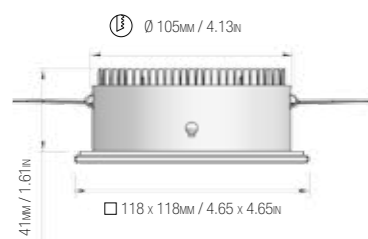

MODEL SPECIFICS:

MODEL CODE: LUMEN: LM/W: BEAM: CRI:
20TIDEG01 784 69 86° 80

VARIABLE PRODUCT CODES:




POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 34 If 350 - CSL) | Code: 2 (2700 Kelvin) | Code: GL (Glass)
Code: D (24 v dc - CLL) | Code: 3 (3000 Kelvin)



* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.



MAIOR OR DOWNLIGHT - 5W - Vf 9 v dc If 500 mA / 5 W - 24 v dc * LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K



MODEL SPECIFICS:

MODEL CODE: LUMEN: LM/W: BEAM: CRI:
20MAIOROR01 264 57 42° 80




VARIABLE PRODUCT CODES:

POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 9 If 500 - CSL) | Code: 2 (2700 Kelvin) | Code: SS (S/Steel AISI 316L)
Code: D (24 v dc - CLL) | Code: 3 (3000 Kelvin)



* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.

MAIOR DOWNLIGHT - 5W - Vf 9 v dc If 500 mA / 5 W - 24 v dc * LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K



MODEL SPECIFICS:

MODEL CODE: LUMEN: LM/W: BEAM: CRI:
20MAIOR01 367 83 68° 80




VARIABLE PRODUCT CODES:

POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 9 If 500 - CSL) | Code: 2 (2700 Kelvin) | Code: SS (S/Steel AISI 316L)
Code: D (24 v dc - CLL) | Code: 3 (3000 Kelvin) | Code: LA (Lacquered RAL 9010)



* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.

VIAREGGIO DOWNLIGHT - 10W - Vf 28 v dc If 350 mA / 5 W - 24 v dc * LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K



MODEL SPECIFICS:

MODEL CODE: LUMEN: LM/W: BEAM: CRI:
20VIARE01 680 76 47° 80

VARIABLE PRODUCT CODES:

POWER SUPPLY: COLOR TEMPERATURE: FINISHES:
Code: N (Vf 28 If 350 - CSL) | Code: 2 (2700 Kelvin) | Code: CH (Chrome)
Code: D (24 v dc - CLL) | Code: 3 (3000 Kelvin) | Code: LA (Lacquered RAL 9010)



* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.