


Downlights

REX

INTERIOR
DOWNLIGHT
VERTICAL SHIFT
ANTIGLARE

Trimless, antiglare, ceiling recessed LED downlight, with symmetrical light distribution on a flood beam. The lighting core can shift up or down to change appearance and light distribution.


Body: ALUMINUM
Frame: ALUMINUM
Protective glass: CLEAR GLASS
Color temperature: 2700 K - 3000 K

Note : Driver not included. 



REX Ø 90 - 12 W

DRIVER TENSION: 110 - 220 
VF 34 If 350 mA




ROSS

INTERIOR
DOWNLIGHT
VERTICAL SHIFT
ANTIGLARE



Trimless, antiglare, ceiling recessed LED downlight, with symmetrical light distribution on a flood beam. The lighting core can shift up or down to change luminaire appearance and light distribution.

Body: ALUMINUM
Frame: ALUMINUM
Protective glass: SANDED GLASS
Color temperature: 2700 K - 3000 K

Note : Driver not included. 





ROSS Ø 70 - 10 W


DRIVER TENSION: 110 - 220 
VF 28 If 350 mA
24 V DC - 5 W 



GAVI DOWNLIGHT - 10W - Vf 28 v DC If 350 mA

** LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K*


BEAM 47° AMPLITUDE DIAGRAM:


MODEL SPECIFICS:


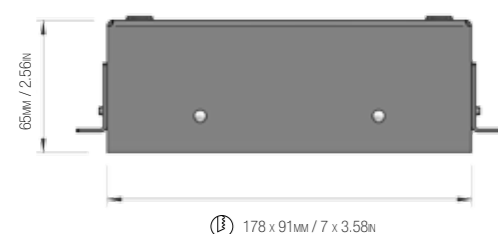
 MODEL CODE: LUMEN: LM/W: BEAM: CRI:
 20GAVI01 755 83 47° 80

VARIABLE PRODUCT CODES:


POWER SUPPLY:	COLOR TEMPERATURE:	FINISHES:
Code: N (Vf 28 If 350 - CSL)	Code: 2 (2700 Kelvin)	Code: CH (Chrome)
	Code: 3 (3000 Kelvin)	Code: LA (Lacquered RAL 9010)

* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.


GAVI D DOWNLIGHT - 2 x 10W - Vf 28 v DC If 350 mA

** LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K*


BEAM 47° AMPLITUDE DIAGRAM:



X 2

MODEL SPECIFICS:


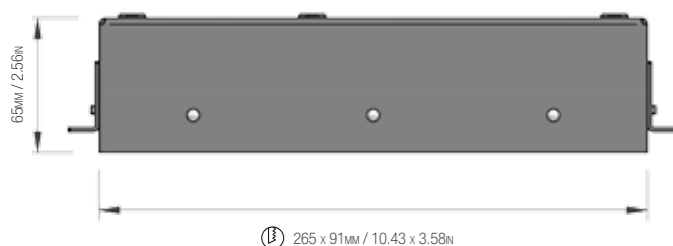
 MODEL CODE: LUMEN: LM/W: BEAM: CRI:
 20GAVID01 2x755 2 x 83 47° 80

VARIABLE PRODUCT CODES:


POWER SUPPLY:	COLOR TEMPERATURE:	FINISHES:
Code: N (Vf 28 If 350 - CSL)	Code: 2 (2700 Kelvin)	Code: CH (Chrome)
	Code: 3 (3000 Kelvin)	Code: LA (Lacquered RAL 9010)

* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.


GAVIT DOWNLIGHT - 3 x 10W - Vf 28 v DC If 350 mA

** LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K*


BEAM 47° AMPLITUDE DIAGRAM:



X 3

MODEL SPECIFICS:



 MODEL CODE: LUMEN: LM/W: BEAM: CRI:
 20GAVIT01 3x755 3 x 83 47° 80

VARIABLE PRODUCT CODES:


POWER SUPPLY:	COLOR TEMPERATURE:	FINISHES:
Code: N (Vf 28 If 350 - CSL)	Code: 2 (2700 Kelvin)	Code: CH (Chrome)
	Code: 3 (3000 Kelvin)	Code: LA (Lacquered RAL 9010)

* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.


PICTOR DOWNLIGHT - 10W - Vf 28 v DC If 350 mA / 5 W - 24 v DC

** LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K*


BEAM 41° AMPLITUDE DIAGRAM:


MODEL SPECIFICS:



 MODEL CODE: LUMEN: LM/W: BEAM: CRI:
 20PICT001 716 81 41° 80

VARIABLE PRODUCT CODES:


POWER SUPPLY:	COLOR TEMPERATURE:	FINISHES:
Code: N (Vf 28 If 350 - CSL)	Code: 2 (2700 Kelvin)	Code: SS (S/Steel AISI 316L)
Code: D (24 v DC - CLL)	Code: 3 (3000 Kelvin)	Code: LA (Lacquered RAL 9010)

* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.


ACOR DOWNLIGHT - 10W - Vf 28 v DC If 350 mA / 5 W - 24 v DC

** LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K*


BEAM 51° AMPLITUDE DIAGRAM:


MODEL SPECIFICS:



 MODEL CODE: LUMEN: LM/W: BEAM: CRI:
 20ACOR01 696 77 51° 80

VARIABLE PRODUCT CODES:


POWER SUPPLY:	COLOR TEMPERATURE:	FINISHES:
Code: N (Vf 28 If 350 - CSL)	Code: 2 (2700 Kelvin)	Code: SS (S/Steel AISI 316L)
Code: D (24 v DC - CLL)	Code: 3 (3000 Kelvin)	Code: LA (Lacquered RAL 9010)

* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.


REX DOWNLIGHT - 12W - Vf 34 v DC If 350 mA

** LUMEN & LUX FLOW DATA RELATIVE TO CSL VERSION LED CRI 80 / 3000 K*


BEAM 46° AMPLITUDE DIAGRAM:


MODEL SPECIFICS:

 MODEL CODE: LUMEN: LM/W: BEAM: CRI:
 20REX01 927 73 46° 80

VARIABLE PRODUCT CODES:

POWER SUPPLY:	COLOR TEMPERATURE:	FINISHES:
Code: N (Vf 34 If 350 - CSL)	Code: 2 (2700 Kelvin)	Code: CH (Chrome)
	Code: 3 (3000 Kelvin)	Code: LA (Lacquered RAL 9010)

* ADD THE VARIABLE CODES TO THE ITEM MASTER CODE.

