

DIMMERAZIONE 24V PER LED STRIP

DIMMING 24V FOR LED STRIP



0717/DIM100


1) Ingresso DALI: selezionare il ponticello come indicato. Possibilità di collegare altri PBOX in parallelo attraverso il collegamento "Syncro".
 2) Ingresso 1...10V: selezionare il ponticello come indicato. Possibilità di collegare altri PBOX in parallelo attraverso il collegamento "Syncro".
 3) Ingresso Pulsante ON/OFF/Dimmer, selezionare il ponticello su "DALI" e attivare la memoria di stato. I collegamenti del pulsante sono in bassa tensione; mantenere isolamento dai collegamenti di rete
 Possibilità di collegare altri PBOX in parallelo attraverso il collegamento "Syncro".
 Togliere il ponticello a tutti i PBOX slave. Massimo 15 Slave.

1) Input DALI: set the jumper as indicated. Possible parallel connection of more PBOX through Synchro-Mode
 2) Input 1...10V: set the jumper as indicated. Possible parallel connection of more PBOX through Synchro-Mode
 3) Input for push ON/OFF/Dimmer: set the jumper on Memory. Connections of push-button in low voltage; keep them far from mains connections. Possible parallel connection of more PBOX through Synchro-Mode. Remove the jumper by all Slaves. Max 15 pcs in total.

0717/DIM100




220 - 240 Vac
50/60 Hz

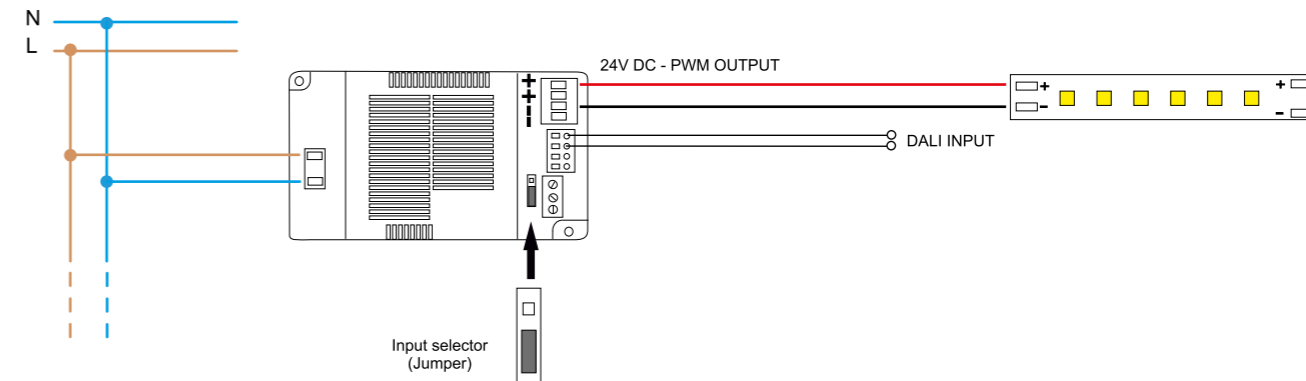

0717/DIM100



220 - 240 Vac
50/60 Hz

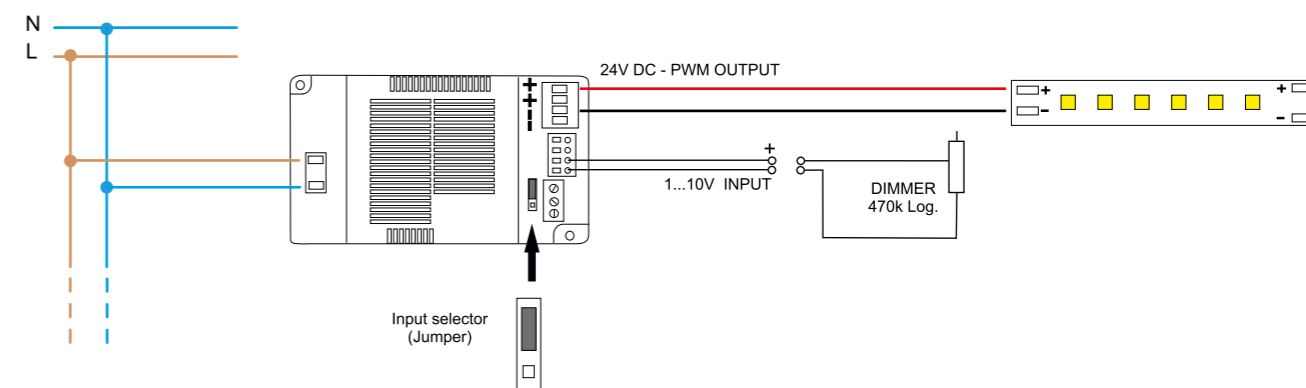

0717/DIM100



220 - 240 Vac
50/60 Hz

