

Lampade a sospensione ,a parete o soffitto in estruso d'alluminio verniciato bianco di diverse lunghezze e diffusore in metacrilato satinato .Doppia emissione disponibile nel modello a sospensione.

Suspensions and wall/ceiling lamps in white painted extruded aluminum.
Satin methacrylate diffuser. Available in different measures.
Double emission available for suspended options.

Suspensions, plafonniers et appliques en aluminium extrudé peint en blanc.
Diffuseur en méthacrylate satiné. Disponible en différentes mesures.
Double émission disponible pour les options suspendues

Pendel-, Wand- und Deckenleuchten aus weiß lackiertem Aluminium.
Diffusor aus Satin-Methacrylat. Verfügbar in verschiedenen Maßen.
Pendelleuchte sind auch mit zweiseitige Ausstrahlung verfügbar.

Colgantes, lámparas de pared y de techo de aluminio extruido pintado de blanco.
Difusor de metacrilato satinado. Disponible en diferentes medidas.
Doble emisión disponible para opciones suspendidas.

Подвесной, настенный и потолочный светильник разной длины из экструзионного алюминия, окрашенного в белый цвет. Диффузор из матового метакрилата.
В подвесном светильнике возможно направление света в две стороны.



Rail
design ABS Studio
2015




1541 1,1 kg
.01 Bianco - White

/W LED 13,5W 1800lm 4000K CRI>90
/WW LED 13,5W 1785lm 3000K CRI>90
/XW LED 13,5W 1613lm 2700K CRI>90



1542 1,5 kg
.01 Bianco - White

/W LED 27W 3600lm 4000K CRI>90
/WW LED 27W 3570lm 3000K CRI>90
/XW LED 27W 3225lm 2700K CRI>90

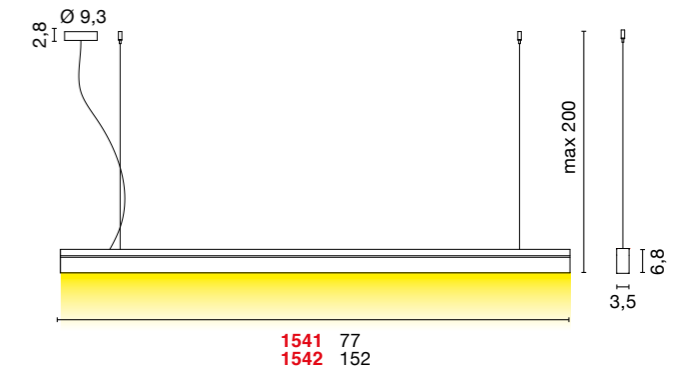

CUSTOM SIZE

Tabella lunghezze disponibili. Le misure si riferiscono alle lunghezze totali delle lampade comprese di tappi.
Table of available lengths. Measures are referred to complete fixtures including closing heads.

LED source 18W/mt CRI>90

cm.	watt	2700K (XW)	lm	3000K (WW)	lm	4000K (W)	lm
77	13,5W	1541.01/XW	1613	1541.01/WW	1785	1541.01/W	1800
102	18W	A1541.01/100/XW	2150	A1541.01/100/WW	2380	A1541.01/100/W	2400
127	22,5W	A1541.01/125/XW	2687	A1541.01/125/WW	2975	A1541.01/125/W	3000
152	27W	1542.01/XW	3225	1542.01/WW	3570	1542.01/W	3600
177	31,5W	A1541.01/175/XW	3762	A1541.01/175/WW	4165	A1541.01/175/W	4200
202	36W	A1541.01/200/XW	4300	A1541.01/200/WW	4760	A1541.01/200/W	4800
227	40,5W	A1541.01/225/XW	4837	A1541.01/225/WW	5355	A1541.01/225/W	5400
252	45W	A1541.01/250/XW	5375	A1541.01/250/WW	5950	A1541.01/250/W	6000
277	49,5W	A1541.01/275/XW	5912	A1541.01/275/WW	6545	A1541.01/275/W	6600
302	54W	A1541.01/300/XW	6450	A1541.01/300/WW	7140	A1541.01/300/W	7200

Il codice prodotto si riferisce alla lampada completa.
Rosone completo di cavo di alimentazione, 2 testate di chiusura e diffusore in policarbonato satinato sono inclusi.

*The product code refers to the complete lamp.
Ceiling rose with cable, 2 closing heads and polycarbonate satin diffuser are included.*

Rail Biemission

design ABS Studio



Rail Biemission

design ABS Studio

1545


1,3 kg

.01 Bianco - White

/W LED 37,5W 1999lm up light + 3000lm down light 4000K CRI>90

/WW LED 37,5W 1982lm up light + 2975lm down light 3000K CRI>90

/XW LED 37,5W 1791lm up light + 2687lm down light 2700K CRI>90

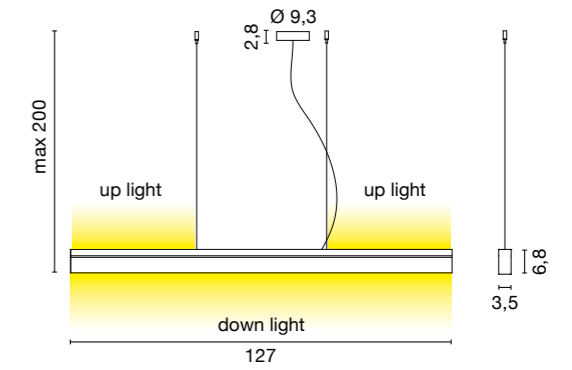

CUSTOM SIZE

Tabella lunghezze disponibili. Le misure si riferiscono alle lunghezze totali delle lampade comprese di tappi.

Table of available lengths. Measures are referred to complete fixtures including closing heads.

LED source 18W/mt CRI>90

L cm.	watt	2700K (XW)		3000K (WW)		4000K (W)	
		Im up	Im down	Im up	Im down	Im up	Im down
127	37,5W	1545.01/XW	1791 2687	1545.01/WW	1982 2975	1545.01/W	1999 3000
152	45W	A1545.01/150/XW	2150 3225	A1545.01/150/WW	2380 3570	A1545.01/150/W	2400 3600
177	55,5W	A1545.01/175/XW	2866 3762	A1545.01/175/WW	3173 4165	A1545.01/175/W	3200 4200
202	60W	A1545.01/200/XW	2866 4300	A1545.01/200/WW	3173 4760	A1545.01/200/W	3200 4800
227	67,5W	A1545.01/225/XW	3225 4837	A1545.01/225/WW	3570 5355	A1545.01/225/W	3600 5400
252	75W	A1545.01/250/XW	3583 5375	A1545.01/250/WW	3966 5950	A1545.01/250/W	4000 6000
277	82,5W	A1545.01/275/XW	3941 5912	A1545.01/275/WW	4363 6545	A1545.01/275/W	4400 6600
302	93W	A1545.01/300/XW	4658 6450	A1545.01/300/WW	5156 7140	A1545.01/300/W	5200 7200

Il codice prodotto si riferisce alla lampada completa.

Rosone completo di cavo di alimentazione, 2 testate di chiusura e diffusore in policarbonato satinato sono inclusi.

The product code refers to the complete lamp.


Ceiling rose with cable, 2 closing heads and polycarbonate satin diffuser are included.



Monoemission



Biemission

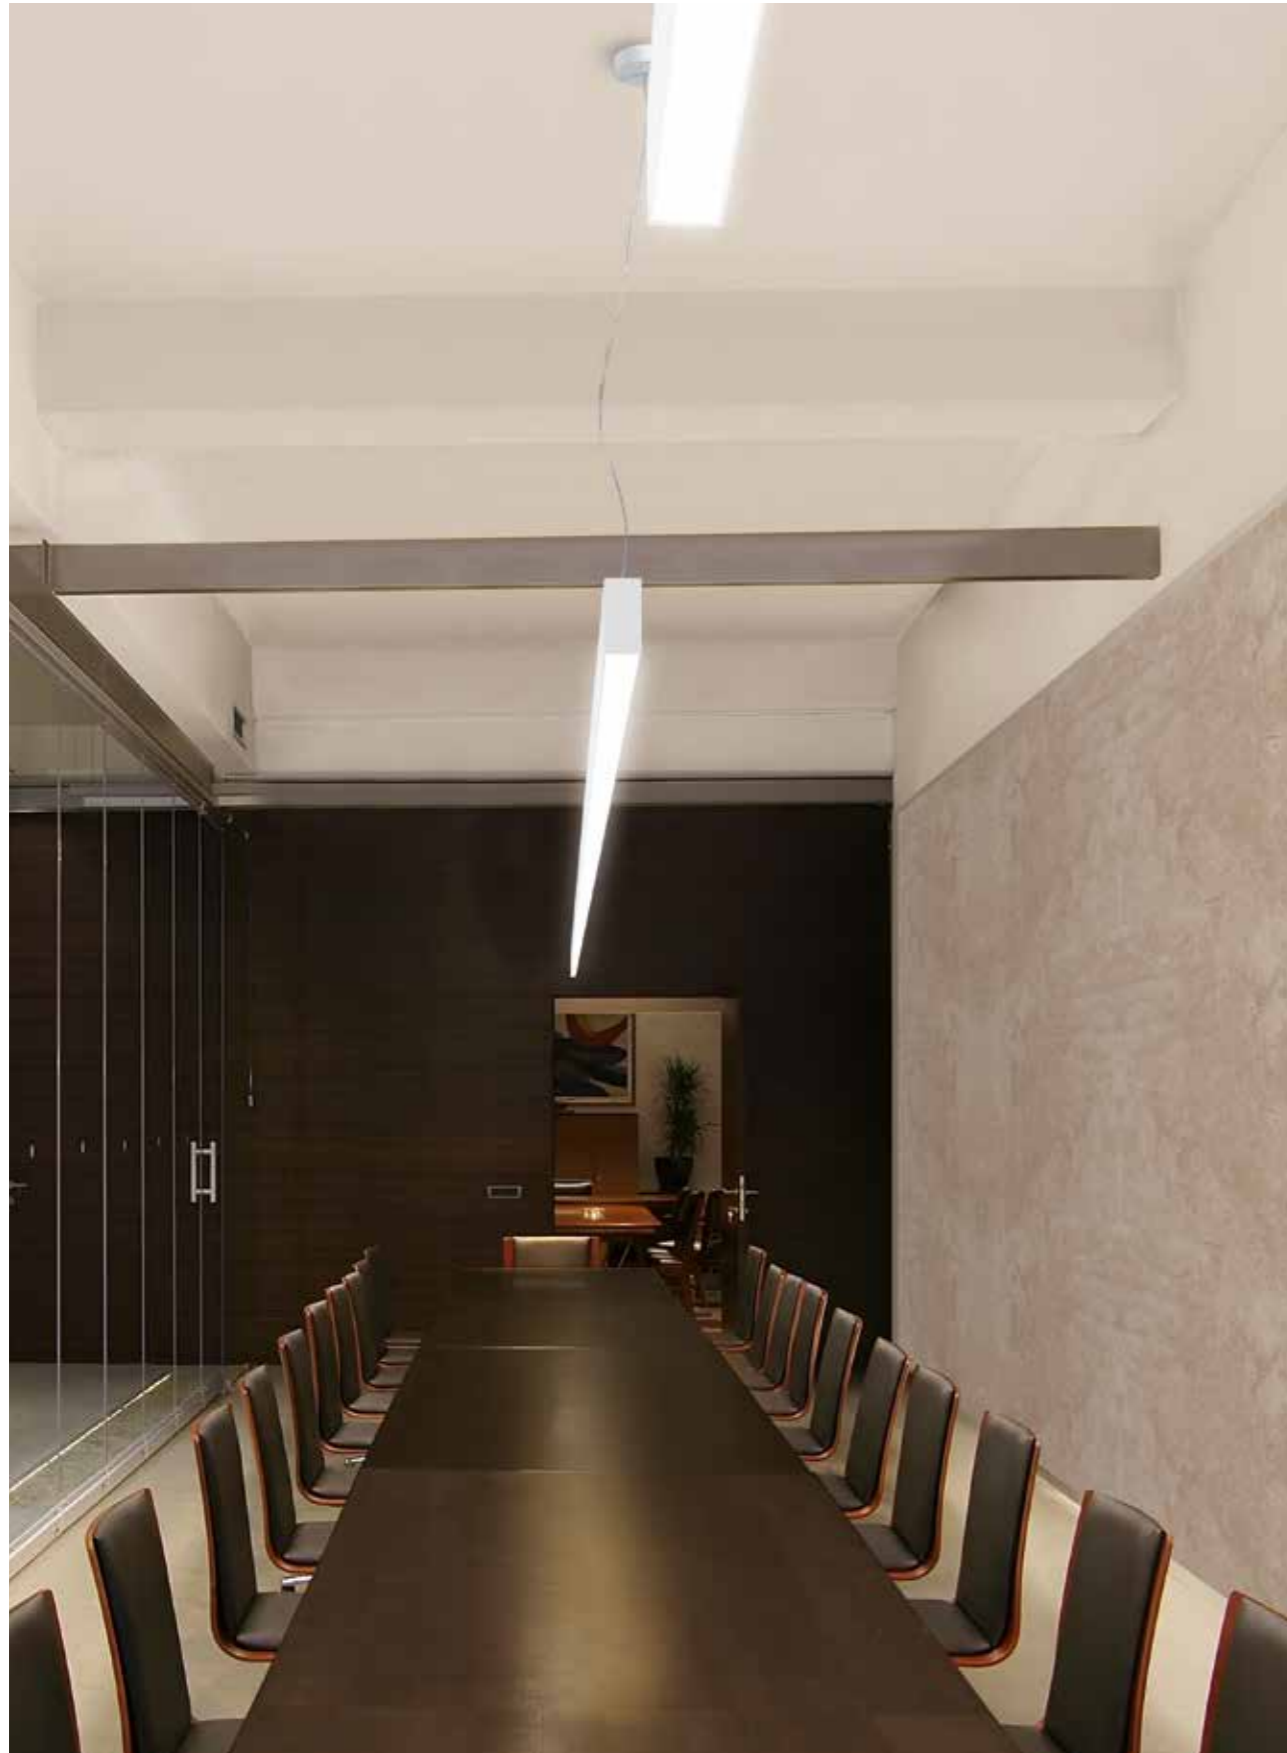

Con diffusore prismatico ad alta efficienza luminosa. Opportunamente installato garantisce UGR<19
With high efficacy prismatic diffuser. Conveniently positioned grants an UGR<19 (Unified Glare Rating)




1547 monoemission

.01 Bianco - White

/125	L. 127cm	0,8 kg
/W	LED 22,5W 3000lm 4000K CRI>90	
/WW	LED 22,5W 2975lm 3000K CRI>90	
/XW	LED 22,5W 2687lm 2700K CRI>90	

/150	L. 152cm	1,0 kg
/W	LED 27W 3600lm 4000K CRI>90	
/WW	LED 27W 3570lm 3000K CRI>90	
/XW	LED 27W 3225lm 2700K CRI>90	

/175	L. 177cm	1,2 kg
/W	LED 31,5W 4200lm 4000K CRI>90	
/WW	LED 31,5W 4165lm 3000K CRI>90	
/XW	LED 31,5W 3763lm 2700K CRI>90	

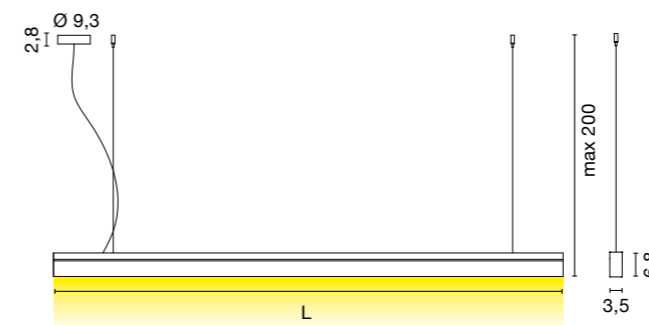


1546 biemission

.01 Bianco - White

/125	L. 127cm	0,9 kg
/W	LED 37,5W 2000lm up light + 3000lm down light 4000K CRI>90	
/WW	LED 37,5W 1983lm up light + 2975lm down light 3000K CRI>90	
/XW	LED 37,5W 1792lm up light + 2687lm down light 2700K CRI>90	

/150	L. 152cm	1,1 kg
/W	LED 45W 2400lm up light + 3000lm down light 4000K CRI>90	
/WW	LED 45W 2380lm up light + 2975lm down light 3000K CRI>90	
/XW	LED 45W 2150lm up light + 2687lm down light 2700K CRI>90	

/175	L. 177cm	1,4 kg
/W	LED 55,5W 3200lm up light + 4200lm down light 4000K CRI>90	
/WW	LED 55,5W 3173lm up light + 4165lm down light 3000K CRI>90	
/XW	LED 55,5W 2867lm up light + 3763lm down light 2700K CRI>90	

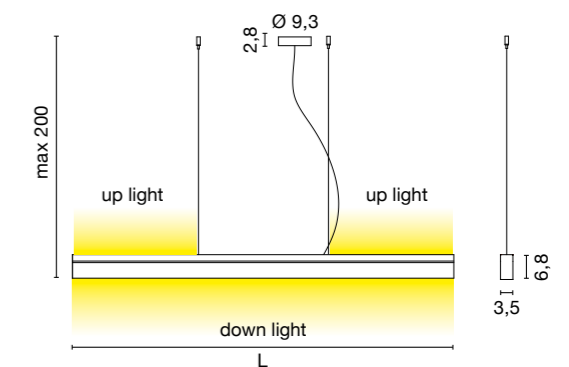




4578 1,1 kg

.01 Bianco - White

/W LED 13,5W 1800lm 4000K CRI>90

/WW LED 13,5W 1785lm 3000K CRI>90

/XW LED 13,5W 1613lm 2700K CRI>90




4579 1,5 kg

.01 Bianco - White

/W LED 27W 3600lm 4000K CRI>90

/WW LED 27W 3570lm 3000K CRI>90

/XW LED 27W 3225lm 2700K CRI>90




CUSTOM SIZE

Tabella lunghezze disponibili. Le misure si riferiscono alle lunghezze totali delle lampade comprese di tappi.
Table of available lengths. Measures are referred to complete fixtures including closing heads.

LED source 18W/mt CRI>90

cm.	watt	2700K (XW)	lm	3000K (WW)	lm	4000K (W)	lm
77	13,5W	4578.01/XW	1613	4578.01/WW	1785	4578.01/W	1800
102	18W	A4578.01/100/XW	2150	A4578.01/100/WW	2380	A4578.01/100/W	2400
127	22,5W	A4578.01/125/XW	2687	A4578.01/125/WW	2975	A4578.01/125/W	3000
152	27W	4579.01/XW	3225	4579.01/WW	3570	4579.01/W	3600
177	31,5W	A4578.01/175/XW	3762	A4578.01/175/WW	4165	A4578.01/175/W	4200
202	36W	A4578.01/200/XW	4304	A4578.01/200/WW	4760	A4578.01/200/W	4800
227	40,5W	A4578.01/225/XW	4837	A4578.01/225/WW	5355	A4578.01/225/W	5400
252	45W	A4578.01/250/XW	5375	A4578.01/250/WW	5950	A4578.01/250/W	6000
277	49,5W	A4578.01/275/XW	5912	A4578.01/275/WW	6545	A4578.01/275/W	6600
302	54W	A4578.01/300/XW	6450	A4578.01/300/WW	7140	A4578.01/300/W	7200

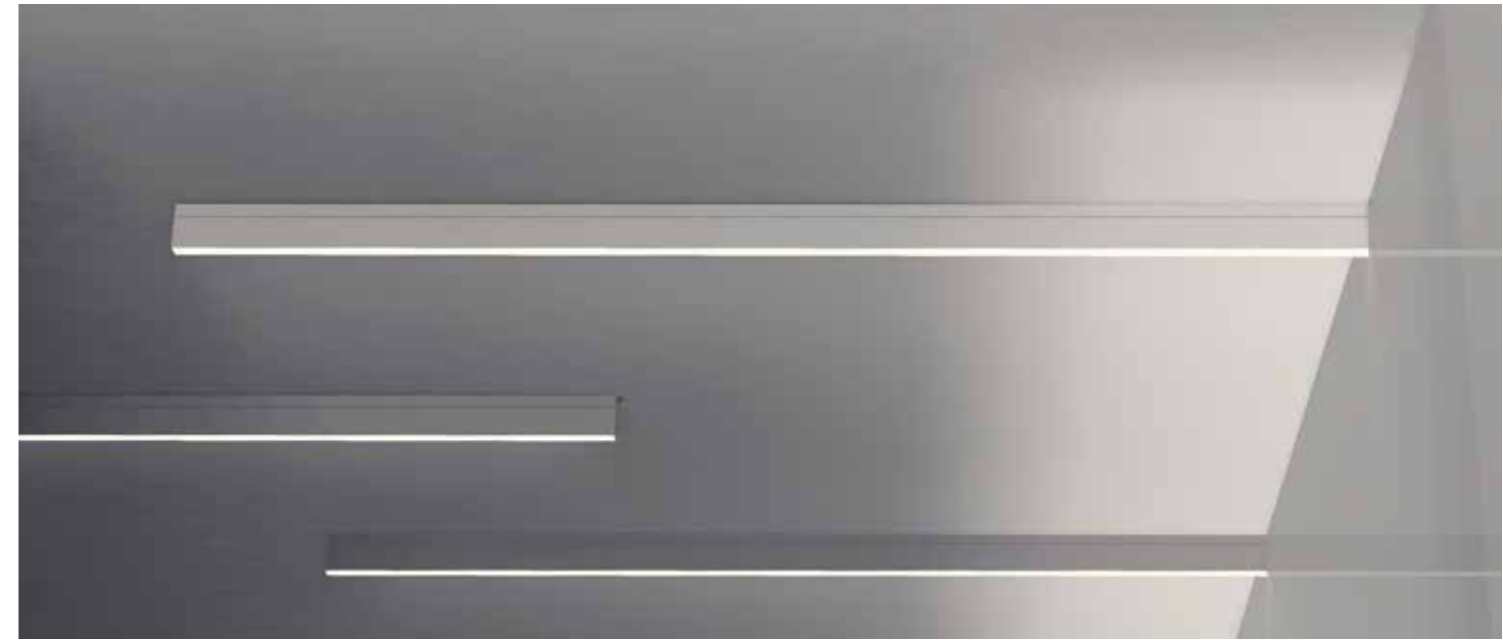


5540 1,1 kg

.01 Bianco - White

/W LED 13,5W 1800lm 4000K CRI>90

/WW LED 13,5W 1785lm 3000K CRI>90

/XW LED 13,5W 1613lm 2700K CRI>90




5541 1,5 kg

.01 Bianco - White

/W LED 27W 3600lm 4000K CRI>90

/WW LED 27W 3570lm 3000K CRI>90

/XW LED 27W 3225lm 2700K CRI>90



CUSTOM SIZE

Tabella lunghezze disponibili. Le misure si riferiscono alle lunghezze totali delle lampade comprese di tappi.
Table of available lengths. Measures are referred to complete fixtures including closing heads.

LED source 18W/mt CRI>90

cm.	watt	2700K (XW)	lm	3000K (WW)	lm	4000K (W)	lm
77	13,5W	5540.01/XW	1613	5540.01/WW	1785	5540.01/W	1800
102	18W	A5540.01/100/XW	2150	A5540.01/100/WW	2380	A5540.01/100/W	2400
127	22,5W	A5540.01/125/XW	2687	A5540.01/125/WW	2975	A5540.01/125/W	3000
152	27W	5541.01/XW	3225	5541.01/WW	3570	5541.01/W	3600
177	31,5W	A5540.01/175/XW	3762	A5540.01/175/WW	4165	A5540.01/175/W	4200
202	36W	A5540.01/200/XW	4304	A5540.01/200/WW	4760	A5540.01/200/W	4800
227	40,5W	A5540.01/225/XW	4837	A5540.01/225/WW	5355	A5540.01/225/W	5400
252	45W	A5540.01/250/XW	5375	A5540.01/250/WW	5950	A5540.01/250/W	6000
277	49,5W	A5540.01/275/XW	5912	A5540.01/275/WW	6545	A5540.01/275/W	6600
302	54W	A5540.01/300/XW	6450	A5540.01/300/WW	7140	A5540.01/300/W	7200