

LUCERNA



| | | | |
|---|--------------|---------------------|-----|
| CE | 230V 50Hz | IP65 | E27 |
| VVG | | Ta -25°C ÷ +30°C | |
| Carton (mm/pcs): 380 x 380 x 580 / 1 | | | |

Use: Light fitting for the illumination of pedestrian zones, parks, orchards and other public areas.


Technical description:

The light fitting body and top cover are made of plastic. The optical cover is made of opal or clear PC. The removal base plate with electrical equipment is fixed to the top cover of the light fitting. The light fitting is to be fixed to a column shank $\varnothing 60$ mm. The max. cross-section of the connecting conductors is 2.5 mm².

Installation:


The light fitting is to be fixed to a column shank $\varnothing 60$ mm. The max. cross-section of the connecting conductors is 2,5mm².

To order:

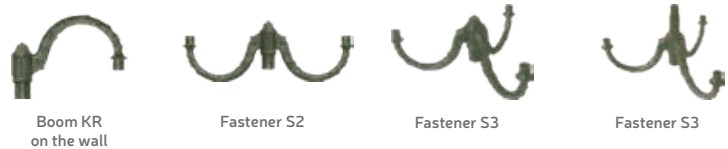

| Type | Recommended light source [W] | Weight [kg] |
|-----------|---|-------------|
| 446 60 15 | Bulb (halogenid) max. 150 | 4,2 |
| 446 60 70 | High-pressure sodium/halide discharge lamp 70 | 5,6 |
| 446 60 80 | High-pressure mercury discharge lamp 80 | 5,2 |
| 446 60 12 | High-pressure mercury discharge lamp 125 | 5,3 |

OPAL

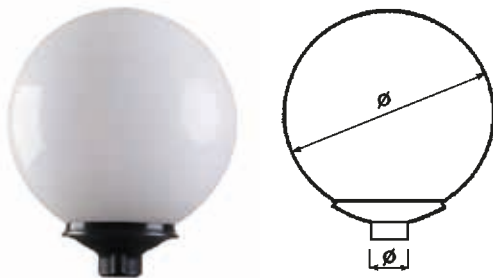

| | | | | |
|--------------------------------------|--------------|---------------------|-----|-----|
| CE | 230V 50Hz | IP65 | E27 | E40 |
| VVG | | Ta -25°C ÷ +30°C | | |
| Carton (mm/pcs): 550 x 550 x 550 / 1 | | | | |

Use: Light fitting for the illumination of pedestrian zones, parks, orchards and other public areas.

Technical description:

The light fitting body is a PC moulding. The optical cover is made up of an opal PMMA moulding $\varnothing 450$ mm. The removal base plate with electrical equipment is fixed to the light fitting body by a three-point bayonet. The light fitting is to be fixed to a column shank $\varnothing 60$ mm. The max. cross-section of the connecting conductors is 2.5 mm².

To order:

Stainless steel grille, opal cover, prismatic, clear or with top silver paint.



Opal cover

| Type | Recommended light source [W] | Electronic ballast dimmable | Weight [kg] |
|-----------|--|-----------------------------|-------------|
| 446 36 50 | High-pressure sodium discharge lamp 50 | - | 3,8 |
| 446 36 70 | High-pressure sodium/halide discharge lamp 70 | - | 4,1 |
| 446 36 73 | High-pressure sodium discharge lamp 70 | Yes | 3,5 |
| 446 36 10 | High-pressure sodium/halide discharge lamp 100 | - | 4,3 |
| 446 36 80 | High-pressure mercury discharge lamp 80 | - | 3,6 |
| 446 36 12 | High-pressure mercury discharge lamp 125 | - | 3,8 |

*It is possible to use a LED bulb 8W - 20W.