

PRACHO LED

Use: Light fitting for the illumination of indoor and outdoor moist, dusty industrial spaces such as halls, warehouses, workshops, corridors, cellars, particularly environments with an increased occurrence of aggressive chemicals.

Technical description:

The body is made of steel sheet finished with powder paint or stainless steel. The optical cover is made of polycarbonate. Electrical equipment is formed by LED module with a regulated power supply. The light fitting is made as a through light fitting and is provided with five-pin terminal block. The max. cross-section of the connecting conductors is 2.5 mm².


Installation:

By hanging, on the ceiling, wall or boom.

Versions:

Electronic ballast (EVG), electronic adjustable ballast (EVG DIMM), emergency unit (EM, with autonomy of 3 hours).

To order:

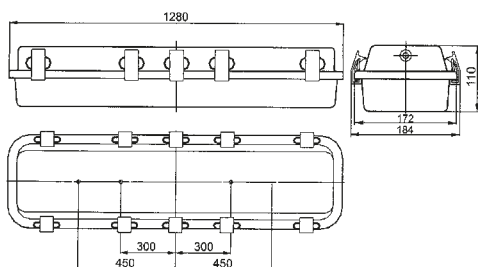

Polycarbonate cover
142.5511/2
1-99.9617PC



Plastic cap
4-99.10213/1



Stainless steel cap
4-99.6188/1

CE	⏚	IP65	EMERGENCY
LED	EVG	EVG DIMM	Carton (mm/pcs): 1290 x 190 x 120 / 1
Ta -25°C ÷ +40°C (591 31 01, 06) -25°C ÷ +45°C (591 31 02, 03, 07, 08) -25°C ÷ +50°C (591 31 04, 09)		120-277V AC 175-265V DC 220-240V AC 50/60Hz	

Type - steel	Power input [W] / Luminous flux [lm]	Luminous efficiency [W/lm]	Colour temperature [K]	CRI	Dimensions A x B x C [mm]	Weight [kg]
591 31 01	65 / 12500	192	4000	>80	1280 x 184 x 110	6
591 31 02	50 / 10000	200	4000	>80	1280 x 184 x 110	6
591 31 03	40 / 7750	194	4000	>80	1280 x 184 x 110	6
591 31 04	25 / 5000	200	4000	>80	1280 x 184 x 110	6

Type - stainless steel	Power input [W] / Luminous flux [lm]	Luminous efficiency [W/lm]	Colour temperature [K]	CRI	Dimensions A x B x C [mm]	Weight [kg]
591 31 06	65 / 12500	192	4000	>80	1280 x 184 x 110	6
591 31 07	50 / 10000	200	4000	>80	1280 x 184 x 110	6
591 31 08	40 / 7750	194	4000	>80	1280 x 184 x 110	6
591 31 09	25 / 5000	200	4000	>80	1280 x 184 x 110	6

*By adding the letter „K“ after the type designation, the light fittings will be provided with steel or stainless-steel protective basket (591 31 01K).