


## AVANTIS-CD2 LED / T8 LED

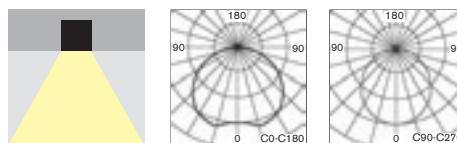

- Exquisite recessed mounted lighting fixture for powerful and energy saving direct illumination
- Suitable for all representative areas, especially for offices, hotels, shops, exhibitions, banks or even modern residential areas
- Available also for LED T8 tubes (all LED T8 versions only, LED tube not incl.)
- It is possible to connect the fixtures to the line ("inline" assembly)
- Modern high quality materials:
  - body made of anodised extruded aluminum profile
  - extruded "opal" milky polycarbonate diffuser
- elegantné LED svietidlo určené pre zapustenú montáž do stropu, možné spájať do línie
- vhodné pre použitie pre moderné reprezentačné interiéry, hotely, výstavníky, banky, obchodné priestory, alebo aj pre moderné obytné priestory
- dostupné aj vo verzii pre pre LED T8 trubice (nie je súčasťou dodávky)
- vysokokvalitné materiály:
  - teleso: eloxovaný extrudovaný AL profil
  - difúzor: polykarbonát

### STANDARD FEATURES

### ŠTANDARDNÁ VÝBAVA

- Recessed mounting accessories
- Ready for DALI Dimming (except from LED T8 versions)
- **MidPower LEDs 150lm/W made by either SAMSUNG or OSRAM** (except from LED T8 versions)
- Equipped with inner "inline" installation wiring
- "Inline" mounting fixation joint
- príslušenstvo pre montáž do stropu
- pripravené pre stmievanie DALI (okrem LED T8 verzii)
- **MidPower LED 150lm/W typu SAMSUNG alebo OSRAM** (okrem LED T8 verzii)
- priebežná vnútorná kabeláž pre montáž do línie
- spojka pre aretáciu svietidiel pri montáži do línie




### OPTIONS

### PRIPLATKY

- Alternative surface treatment is possible (min.order quantity 50pcs)
- povrchová úprava svietidla podľa špecifikácie v RAL (min. 50ks)

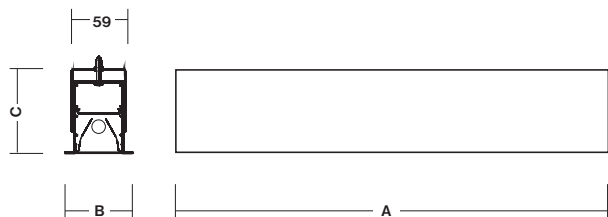

**AVANTIS-CD2 LED / T8 LED**

**Recessed mounting hole size (LxW)=**  
**= (total module length -15mm) x 68mm**  
 Required height of false ceiling is min120mm

**Rozmer montážneho otvoru (DxŠ)= (celková dĺžka modulov -15mm) x 68mm**  
 Min.požadovaná svetlá výška nad sádkartónovým stropom je min.120mm

**AVANTIS-CD2 LED T8**

Type / Typ	A x B x C mm	Power	Light Source	Order Code	Weight
AVANTIS-CD2 T8-LED/600mm	673 x 80 x 86 mm	230V AC	1x LED T8 600mm (not included)	249-B-900-01-00	1,5 kg
AVANTIS-CD2 T8-LED/1200mm	1283 x 80 x 86 mm	230V AC	1x LED T8 1200mm (not included)	249-B-901-01-00	2,5 kg
AVANTIS-CD2 T8-LED/1500mm	1583 x 80 x 86 mm	230V AC	1x LED T8 1500mm (not included)	249-B-902-01-00	3,0 kg
AVANTIS-CD2 T8-LED/2x1200mm	2513 x 80 x 86 mm	230V AC	2x LED T8 1200mm (not included)	249-B-903-01-00	5,0 kg
AVANTIS-CD2 T8-LED/2x1500mm	3113 x 80 x 86 mm	230V AC	2x LED T8 1500mm (not included)	249-B-904-01-00	6,0 kg

**AVANTIS-CD2 LED**

Type / Typ	A x B x C mm	Power	Light Source	CRI	Order Code	Weight
AVANTIS-CD2-DIM-DALI 8W	592 x 80 x 86 mm	230V AC	LED 3000K / 1120lm	typ 82	249-B-950-01-00	2,0 kg
AVANTIS-CD2-DIM-DALI 8W	592 x 80 x 86 mm	230V AC	LED 4000K / 1120lm	typ 82	249-B-951-01-00	2,0 kg
AVANTIS-CD2-DIM-DALI 13W	871 x 80 x 86 mm	230V AC	LED 3000K / 1680lm	typ 82	249-B-952-01-00	2,5 kg
AVANTIS-CD2-DIM-DALI 13W	871 x 80 x 86 mm	230V AC	LED 4000K / 1680lm	typ 82	249-B-953-01-00	2,5 kg
AVANTIS-CD2-DIM-DALI 18W	1150 x 80 x 86 mm	230V AC	LED 3000K / 2400lm	typ 82	249-B-954-01-00	3,0 kg
AVANTIS-CD2-DIM-DALI 18W	1150 x 80 x 86 mm	230V AC	LED 4000K / 2400lm	typ 82	249-B-955-01-00	3,0 kg
AVANTIS-CD2-DIM-DALI 23W	1428 x 80 x 86 mm	230V AC	LED 3000K / 3000lm	typ 82	249-B-956-01-00	3,5 kg
AVANTIS-CD2-DIM-DALI 23W	1428 x 80 x 86 mm	230V AC	LED 4000K / 3000lm	typ 82	249-B-957-01-00	3,5 kg

All LED parameters are describing the light source lm output. For the lighting calculation please use LDT file available on [www.sec.sk](http://www.sec.sk)  
 LED parametre sú platné pre LED svetelné zdroje samotné. Pre svetelno-technický výpočet použite LDT súbor na [www.sec.sk](http://www.sec.sk)