

RECESSED MOUNTING LEDLUX-V



- Modern design **recessed LED** non-maintained (NM), maintained (M) or centralised (C) emergency lighting with smooth legend illumination for all **areas such as offices, shops, hotels, banks, entrance halls, schools, hospitals, etc.**

It is available in all following versions:

- **AUTOTEST** (-AT)
- **CENTRAL BATTERY** (C.LEDLUX) for **non-addressable CBS** (look up also page No.44)
- Conforming to the requirement of EN60598-2-22, EN1838, EN62034
- Design:
 - metal sheet body with PE powder coat finish RAL9006 (grey) or RAL9003 (white) or RAL9005 (čierna)
 - Special suspended plexi with layered design for perfect smooth illumination of a legend. It must be ordered as a separate item- look up the page No.194
- moderné stropné zapustené LED svietidlo pre **netrvalé (NM), trvalé (M) alebo centrálne (C)** núdzové osvetlenie s perfektnou rovnomernosťou osvetlenia piktogramu navrhnuté pre všeobecné použitie priestorov ako napr. kancelárie, obchody, školy, nemocnice, vstupné haly, banky a pod., aj s funkciami:
 - **AUTOTEST** (-AT)
 - **CENTRAL BATTERY** (C.LEDLUX) pre **neadresovateľné CBS** (pozri str.14)
 - spĺňa požiadavky európskej normy EN 60598-2-22, EN1838, EN62034
 - konštrukcia:
 - teleso z ocelového plechu vo farbe RAL9006 (šedá) alebo RAL9003 (biela) alebo RAL9005 (čierna)
 - špeciálne vrstvené závesné plexi pre rovnomerné osvetlenie piktogramu na jeho celej ploche (musí byť objednané ako samostatná položka - pozri str. 194)



← → 26m



← → 26m



← → 26m

STANDARD FEATURES



- LEDs indicating both presence of power supply and signaling failures
- TEST button
- signalizácia LED
- TEST tlačítko

STANDARDNÁ VÝBAVA

OPTIONAL ACCESSORIES

- **Special suspended plexi with layered design for perfect smooth illumination of legend. It must be ordered as a separate item- look up the page No.194**
- Alternative colour surface treatment in RAL (min order quantity 100pcs)
- **špeciálne vrstvené závesné plexi pre rovnomerné osvetlenie piktogramu na jeho celej ploche (plexi musí byť objednané samostatne podľa želaného piktogramu- viď strana 194 pre detaily)**
- povrchová úprava vo farbe podľa špecifikácie odberateľa (min 100ks)

PRÍPLATKY

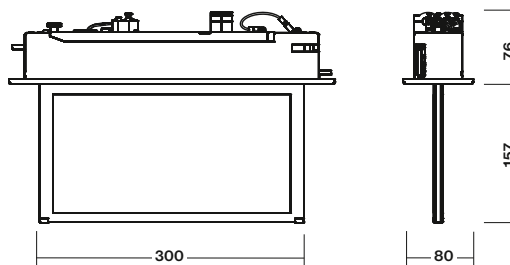

Recessed mounting hole size: 336 x 57 mm
Rozmer montážneho otvoru : 336 x 57 mm

Input Power:

- 3,9W / 7,4VA (maintained M)
- 2,6W / 5,8VA (non-maintained NM)
- 1,3W / 4,0VA (CBS)



NM/M

Type	Version	Colour	Light Source	Duration	Battery	Order Code	Weight
MULTILED-V 3h RAL9006	Only Body, No Plexi incl.	Grey / šedá	8x LED	3h	NiMh 4,8V/0,85Ah	85-B-100-05-00	1,2 kg
MULTILED-V 3h RAL9003	Only Body, No Plexi incl.	White / biela	8x LED	3h	NiMh 4,8V/0,85Ah	85-B-100-06-00	1,2 kg
MULTILED-V 3h RAL9005	Only Body, No Plexi incl.	Black / čierna	8x LED	3h	NiMh 4,8V/0,85Ah	85-B-100-07-00	1,2 kg

Page No.32

AUTOTEST -AT NM/M

Type	Version	Colour	Light Source	Duration	Battery	Order Code	Weight
MULTILED-V-AT 1h RAL9006	Only Body, No Plexi incl.	Grey / šedá	12x LED	1h	NiMh 4,8V/0,85Ah	85-B-101-05-00	1,2 kg
MULTILED-V-AT 1h RAL9003	Only Body, No Plexi incl.	White / biela	12x LED	1h	NiMh 4,8V/0,85Ah	85-B-101-10-01	1,2 kg
MULTILED-V-AT 3h RAL9006	Only Body, No Plexi incl.	Grey / šedá	12x LED	3h	NiMh 4,8V/2,1Ah	85-B-102-05-00	1,3 kg
MULTILED-V-AT 3h RAL9003	Only Body, No Plexi incl.	White / biela	12x LED	3h	NiMh 4,8V/2,1Ah	85-B-102-04-00	1,3 kg

Page No.44

CENTRAL BATTERY (CBS)

Type	Version	Colour	CBS Version for	Light Source	Order Code	Weight
C.LEDLUX-V 230V AC/DC RAL9006	Only Body, No Plexi incl.	Grey / šedá	CBS NON-ADDRESSABLE	12x LED	85-B-104-05-00	1,0 kg
C.LEDLUX-V 230V AC/DC RAL9003	Only Body, No Plexi incl.	White / biela	CBS NON-ADDRESSABLE	12x LED	85-B-104-06-00	1,0 kg
C.LEDLUX-V 230V AC/DC RAL9005	Only Body, No Plexi incl.	Black / čierna	CBS NON-ADDRESSABLE	12x LED	85-B-104-05-02	1,0 kg
C.LEDLUX-V 24V AC/DC RAL9006	Only Body, No Plexi incl.	Grey / šedá	CBS NON-ADDRESSABLE	12x LED	85-B-114-05-00	1,0 kg
C.LEDLUX-V 24V AC/DC RAL9003	Only Body, No Plexi incl.	White / biela	CBS NON-ADDRESSABLE	12x LED	85-B-114-06-00	1,0 kg

ACCESSORIES LEDLUX-V

- It is not included in standard package. It must be ordered as separate item !
- nie je súčasťou štandardného balenia svietidla, musí byť objednané ako samostatná položka !



- Viewing Distance 26m for all H,I,J,K,L,M,N versions in accordance with ISO7010
- rozoznatelnosť piktogramu 26m pre všetky H,I,J,K,L,M,N v súlade s ISO7010

OPTIONAL ITEM / PRÍPLATOK	Order Code / Objednávaci kód
Double sided plexi H/J, obojstranné plexi H/J	85-B-312-23-01
Double sided plexi I, obojstranné plexi I	85-B-312-21-01
Single sided plexi H, jednostranné plexi H	85-B-312-29-01
Single sided plexi I, jednostranné plexi I	85-B-312-20-01
Single sided plexi J, jednostranné plexi J	85-B-312-30-01
Double sided plexi K/M, obojstranné plexi K/M	85-B-19-40-01
Double sided plexi L/N, obojstranné plexi L/N	85-B-19-41-01
Single sided plexi K, jednostranné plexi K	85-B-19-46-01
Single sided plexi L, jednostranné plexi L	85-B-19-47-01
Single sided plexi M, jednostranné plexi M	85-B-19-48-01
Single sided plexi N, jednostranné plexi N	85-B-19-49-01
Double sided plexi O, obojstranné plexi O	85-B-19-50-01
Single sided plexi O, jednostranné plexi O	85-B-19-50-02
Double sided plexi Z1, obojstranné plexi Z1	309-B-000-00-00-27
Double sided plexi Z2, obojstranné plexi Z2	309-B-000-00-00-28

