



IP2

230 V
50 Hz



Ø 16
G 5

2,5 mm²

t_a
40 °C

PLEXI

FLUORESCENT EMERGENCY
lighting fittings



Use:

PLEXI are universal emergency fluorescent lighting fittings for using as non-maintained or maintained emergency illumination of an area with ambient temperature from 0 °C to +40 °C. Insulation class I. They can be built into lower ceiling.

Emergency operation time is 3 hours. Charging time is 24 hrs.

Luminaire includes electric power network and battery charge LED indicator, high-temperature nickel-cadmium batteries and electronic protection against complete battery discharge.

Description, optics:


The body is made of steel sheet powder coated with white or silver colour.

The body is fitted with electronic equipment.


The diffuser is made of plexi glass.

The way of fitting's suspension:

to be built in plasterboard lower ceiling

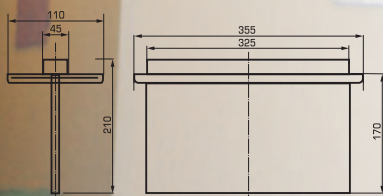

Order code	Type	Inverter	Light source	Battery source	Net weight	Protection
PLEXI – recognition distance 30 m						
maintained emergency luminaires						
41038	PLEXI 108 M3h	SA	T5/G5	3 hrs/2,5Ah	1,6 kg	IP 20
41068	PLEXI 108 M3hAt	AT-SA	T5/G5	3 hrs/2,5Ah	1,6 kg	IP 20
non-maintained emergency luminaires						
41039	PLEXI 108 NM3h	SE	T5/G5	3 hrs/2,5 Ah	1,3 kg	IP 20
41069	PLEXI 108 NM3hAt	AT-SE	T5/G5	3 hrs/2,5 Ah	1,3 kg	IP 20
modification for emergency supply from central battery AC/DC						
41078	PLEXI 108 CB		T5/G5		0,4 kg	IP 20
modification for network supply						
41088	PLEXI 108		T5/G5		0,7 kg	IP 20
PLEXI LED – 96 cd diodes - recognition distance 30 m						
maintained emergency luminaires						
41538	PLEXI LED M3h	SA	LED	3 hrs/2,5Ah	1,9 kg	IP 20
non-maintained emergency luminaires						
41539	PLEXI LED NM3h	SE	LED	3 hrs/2,5 Ah	1,6 kg	IP 20

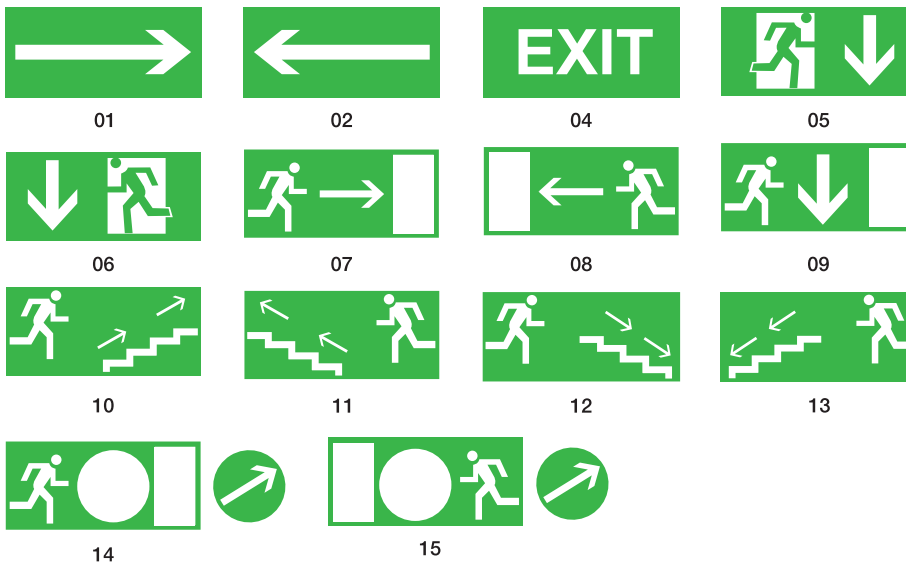

Pictographs for HELIOS emergency luminaires – 15 types			
Order code	Type		Dimensions mm
43901	Pictograph 01 HE	recognition distance 25 m	125 x 250
43915	Pictograph 15 HE	recognition distance 25 m	125 x 250

Pictographs for TIGRIS emergency luminaires – 15 types			
Order code	Type		Dimensions mm
42901	Pictograph 01 TG	recognition distance 20 m	100 x 300
42915	Pictograph 15 TG	recognition distance 20 m	100 x 300

Pictographs for PLEXI, HELIOS PL, TIGRIS PL emergency luminaires – 15 types			
Order code	Type		Dimensions mm
41901	Pictograph 01 PL	recognition distance 30 m	150 x 300
41915	Pictograph 15 PL	recognition distance 30 m	150 x 300

